

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 86109347.4

(22) Date of filing: 09.07.86

(51) Int. Cl.<sup>4</sup>: **C 08 F 214/26**  
**/(C08F214/26, 214:16, 214:18,**  
**216:14)**

(30) Priority: 09.07.85 US 753276

(43) Date of publication of application:  
14.01.87 Bulletin 87/3

(84) Designated Contracting States:  
DE FR GB IT NL

(71) Applicant: **E.I. DU PONT DE NEMOURS AND COMPANY**  
1007 Market Street  
Wilmington Delaware 19898(US)

(72) Inventor: **Beklarian, Paul Gregory**  
316 New York Avenue  
Claymont Delaware 19703(US)

(72) Inventor: **Gilmore, Paul Thomas**  
32 Pierson, RD 1  
Hockessin Delaware 19707(US)

(74) Representative: **Abitz, Walter, Dr.-Ing. et al,**  
**Abitz, Morf, Gritschneider, Freiherr von Wittgenstein**  
Postfach 86 01 09  
D-8000 München 86(DE)

(54) **Melt-processing tetrafluoroethylene copolymers and process for preparing them.**

(57) **A thermoplastic, non-thermosettable copolymer of tetrafluoroethylene, an iodoperfluoroalkyl ethylene and an optional selected third comonomer. The copolymer can be extruded at higher rates than heretofore possible.**

TITLEMELT-PROCESSIBLE TETRAFLUOROETHYLENE  
COPOLYMERS AND PROCESS FOR PREPARING THEMFIELD OF THE INVENTION

5 This invention relates to improved  
tetrafluoroethylene copolymers that can be  
melt-processed. The copolymers can be extruded at  
faster rates than conventional ones. The copolymers  
also have higher values of melt tension than  
10 conventional ones.

BACKGROUND OF THE INVENTION

There are two classes of tetrafluoroethylene  
polymers, non-melt-processible and melt-processible.  
The non-melt-processible ones are composed  
15 essentially of recurring tetrafluoroethylene units,  
i.e., they are substantially homopolymers of high  
molecular weight. They can be processed into shaped  
articles only by sintering or ram-extrusion, or by  
paste extrusion, depending on type.

20 In sharp contrast, melt-processible  
tetrafluoroethylene polymers can be melted and  
extruded in ordinary melt-extrusion equipment. They  
contain comonomer units which permit lowering the  
melt viscosity of the polymer enough to make the  
25 polymer melt-extrudable. Thus they can be molded  
into extruded articles, injection molded articles, or  
used as coatings for wire and tubes, and the like.  
The copolymers tend to undergo melt fracture as  
extrusion rates, i.e., speeds, increase and this  
30 results in rough surfaces of extruded articles. An  
increase in extrusion rates before onset of melt  
fracture is a desirable goal for improving these  
melt-processible polymers. Such an improvement is  
found in the copolymers of this invention.

SUMMARY OF THE INVENTION

This invention is directed to a melt-processible, non-elastomeric, thermoplastic, non-thermosetting tetrafluoroethylene copolymer resin which contains a very small amount of recurring units derived from at least one iodo(perfluoroalkyl) (C<sub>1</sub>-C<sub>10</sub>) ethylene. The copolymers can be extruded at faster rates than conventional ones. The copolymers also have higher values of melt tension than conventional ones.

DETAILED DESCRIPTION OF THE INVENTION

The copolymer, in a preferred aspect, will contain

a) at least 99.97 weight percent recurring units derived from tetrafluoroethylene based on weight of a) and b),

b) sufficient recurring units, but not more than 0.03 weight percent based on a) and b), derived from at least one iodo(perfluoroalkyl) (C<sub>1</sub>-C<sub>10</sub>) ethylene, to produce at least 0.00005 weight percent iodine based on weight of a) and b),

c) between 0.5-20 weight percent, based on weight of a), b) and c), recurring units derived from at least one ethylenically unsaturated comonomer of the formula R<sub>f</sub>-CF=CF<sub>2</sub> or R<sub>f</sub>OCF=CF<sub>2</sub> or mixtures thereof, wherein R<sub>f</sub> is perfluoroalkyl of 1-10 carbon atoms,

said copolymer having

- (i) a melt tension number of at least 331 microgram per Pa·s,
- (ii) an MV<sub>5</sub> of between 10<sup>2</sup> and 10<sup>6</sup> Pa·s.

The iodo(perfluoroalkyl) ethylene is preferably one in which the alkyl group has the formula {CF<sub>2</sub>}<sub>x</sub> where x is a cardinal number of 1-10

inclusive. 4-iodo-3,3,4,4-tetrafluorobutene-1 is preferred. It has the formula  $\text{ICF}_2\text{-CF}_2\text{-CH=CH}_2$ . It is sometimes referred to as ITFB. Tetrafluoroethylene has the formula

5  $\text{CF}_2=\text{CF}_2$ .

Comonomers of the formula  $\text{R}_f\text{CF=CF}_2$  are represented by hexafluoropropylene (HFP) and the like. Comonomers of the formula  $\text{R}_f\text{OCF=CF}_2$  are represented by perfluoropropylvinyl ether (PPVE) and  
10 the like. The amount of these comonomers present is large enough to render the copolymer melt-processible. Ordinarily, tetrafluoroethylene homopolymer has a melt viscosity so high that it cannot be processed through ordinary molding  
15 equipment.

By the term "melt-processible" is meant that the copolymer can be processed (i.e., fabricated into shaped articles such as films, fibers, tubes, wire coatings and the like) by conventional melt extruding  
20 means. Such requires that the melt viscosity at the processing temperature, e.g., 320-400°C, be no more than  $10^6$  Pa·s. Preferably it is in the range of  $10^2$  to  $10^6$  Pa·s and most preferably  $10^3$  to  $10^5$  Pa·s. Thus, the amount of comonomer present in the  
25 melt-processible tetrafluoroethylene copolymers will be an amount sufficient to impart melt-processibility to the copolymer. Generally, for the perfluoro(alkyl vinyl ethers), this amount will be at least 0.5% by weight based on weight of copolymer, and can be up to  
30 about 20%. Preferably the amount will be about 2-7% and the alkyl group will be  $\text{n-C}_3\text{F}_7$ . Generally, for the perfluoro(terminally unsaturated olefin), the amount will be at least about 10% by weight based on  
35 weight of copolymer, and can be up to about 20 or

25%. Preferably the amount will be about 10-15% and the olefin will be  $C_3F_6$  (hexafluoropropylene).

The copolymers are nonelastomeric and are partially crystalline. After extrusion, they do not exhibit a rapid retraction to substantially the original length from a stretched condition of 2X at room temperature.

By the term "non-thermosetting" is meant that after heating the copolymer above its melting point for a specified time and cooling to below its melting point, the copolymer is still melt processible. Thus, no chemical cross-linking reactions have occurred in the polymer which result in formation of a polymer network.


The polymers of this invention can be prepared by an aqueous polymerization procedure. In this procedure, a stainless steel autoclave is charged with a demineralized water, and a surfactant, such as ammonium perfluorooctanoate (C-8).

Iodo-perfluoroalkyl ethylene is added with an initiator, such as ammonium persulfate (APS) or potassium persulfate (KPS). The iodo monomer can be added continuously, in a precharge, or can be added in a partial precharge plus continuously. The autoclave is then pressurized with TFE and comonomer at 50-120°C at pressures of 0.69-5.5 MPa gauge and the polymerization begins under agitation. Polymer produced is mechanically coagulated and collected. A general procedure is set forth in Khan et al., U.S. Patent 4,380,618.

The copolymers of this invention exhibit a 2- to 3-fold increase in extrusion rates before the onset of melt fracture and have a higher melt tension at a given melt viscosity than polymers identically constituted except that they do not contain any

iodo-perfluoroalkyl ethylene. It is theorized that the increase in extrusion rate and the higher melt tension is caused by the action of the iodo-perfluoroalkyl ethylene creating a chain

5 branching site when this monomer enters the chain, as per the following equation:

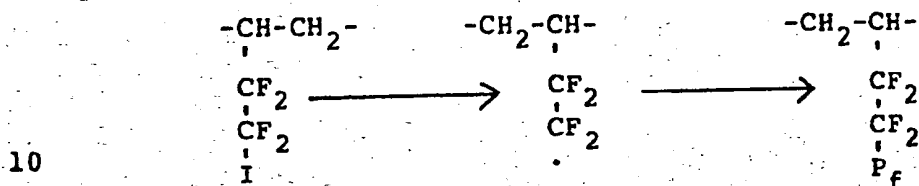

wherein  $P_f$  is the newly formed polymer chain.

The carbon-iodine bond is selectively weak, and it cleaves, leaving a radical site available for radical attack by another monomer unit or by a perfluorinated hydrocarbon radical.

15

Thus a copolymer is obtained in which carbon chains are believed to be formed which have long chain branches. It is understood that the amount of the iodo monomer is kept small so that this chain branching occurs rather than crosslinking of carbon chains. A crosslinked polymer is of course intractible and incapable of being melt-processed. Chain or branch growth terminates by terminating radical formation as, for example, by bond formation from two polymer chain radicals.

20

25

The copolymers of this invention are useful in high speed extrusion applications such as wire cable coating, film extrusions and the like. In addition, the copolymer can be used to make foamed articles of small cell size foam by mixing with foaming agents as described for example in U.S. Patent 3,072,583 and extruding the mixture.

30



TEST PROCEDURES

1.  $MV_5$  (melt viscosity after 5 minutes residence time)

The  $MV_5$  of the copolymers is a melt viscosity measured according to ASTM D-1238-82 modified by (1) using a cylinder, orifice and piston tip made of a corrosion-resistant alloy, such as Haynes Stellite 19, (2) charging a 5.0 g sample to the 9.53 mm inside diameter cylinder which is maintained at  $372^\circ\text{C} \pm 1^\circ\text{C}$ , (3) extruding the sample 5 minutes after charging, through a 2.10 mm diameter, 8.00 mm long square-edged orifice under a load (piston plus weight) of 5000 g (this corresponds to a shear stress of  $4.5 \times 10^4$  Pa). The  $MV_5$  in Pa.s is calculated as 5315 divided by the observable extrusion rate in grams per minute.

2. Polymer Composition

a.  $R_f\text{CF} = \text{CF}_2$  Content. (as represented by hexafluoropropylene (HFP))

The HFP content is determined by measurement of the ratio of the IR absorbance at 10.18 micrometers and the absorbance at 4.23 micrometers. This ratio is referred to as the HFP index, or the HFPI. The IR measurements were made using a Miran Model 80 infrared spectrophotometer. The scans were run at slow speed under a nitrogen atmosphere. Approximately 0.05 mm thick compression molded films were used for the measurements. However, for TFE/HFP/PPVE terpolymers (PPVE = perfluoropropyl vinyl ether), the PPVE band at 10.05 micrometers overlaps the HFP band at 10.18 micrometers. Thus, the HFPI for these terpolymers is corrected for the contribution from the PPVE band. The amount of PPVE in the terpolymer was determined by a different procedure, which is described below.

A correction to the HFPI determination was found to be 0.25 times the weight percent of PPVE in the terpolymer. This formula for correcting the HFPI is shown below:

$$\text{HFPI (Corrected)} = \text{HFPI (measured)} - 0.25 \times \text{wt \% PPVE}.$$

The relationship between the HFPI and HFP content is as follows:

$$\text{wt \% HFP} = 3.2 \times \text{HFPI}.$$

b.  $\text{R}_f\text{-O-CF=CF}_2$  Content (as represented by Perfluoropropyl vinyl ether (PPVE))

The weight percent PPVE content is determined by measurement of the ratio of the IR absorbance at 10.05 micrometers and the absorbance at 4.23 micrometers. The IR measurements were made using a Perkin Elmer 283B Infrared Spectrophotometer. Scans were run at slow speed under a nitrogen atmosphere, approximately 0.05 mm thick compression molded films were used for the measurements. The PPVE content of TFE/HFP/PPVE terpolymers is determined from the measurement of the absorbance band at 7.46 micrometers. A 0.1 to 0.15 mm thick film of the sample is pressed at 350°C. A TFE/HFP copolymer film of the same thickness (to within 0.005 to 0.008 mm) is also pressed. Each film is scanned through the absorbance band at 4.23 micrometers. If the films differ by more than 0.03 absorbance units, more closely matched films are prepared. When a match is obtained at 4.23 micrometers, the absorbance of the terpolymer film at 7.46 micrometers, compensated by the TFE/HFP copolymer film, is determined. Due to the large

amount of compensating absorbance in the reference beam, the pen response will be slow. The scan is stopped at the band maximum and checked to see that pen response is adequate for the scan speed being used. If not, the instrument parameters are readjusted and the spectrum rerun. Since total adsorption occurs just beyond the maximum, the base line is taken by extrapolation from the high-frequency side of the band. The method is calibrated using the TFE/PPVE copolymer film of known PPVE content. The relationship between absorbance at 7.46 micrometers and PPVE content is as follows:

$$\text{wt. \% PPVE} = 1.25 \times (\text{absorbance at } 7.46 \text{ micrometers}) \div \text{film thickness in mm}$$

### c. Iodine Content

Iodine content can be determined by placing 50 gm of polymer in a solution containing 10 ml "FREON" 113, 15 ml glacial acetic acid, and 0.1 g KI. The KI forms an  $I_3^-$  complex with the extracted  $I_2$ . The absorbance at 485 nm is measured and compared with prepared standards. The iodine content of the polymer can then be calculated.

### 25 3. Melt Tension

Melt tension is the force required to uniaxially draw a molten polymer strand as it extrudes from a piston rheometer.

A sample of polymer (15 g) is charged to the barrel of a piston rheometer maintained at  $370^\circ\text{C} \pm 1^\circ\text{C}$ . It is extruded at a constant rate of  $0.1086 \text{ cm}^3/\text{min}$  through a capillary die with a bore of 1.905 mm and a length of 38 mm. Under these conditions the shear rate experienced by the polymer is  $2.66 \text{ s}^{-1}$ . The molten extrudate is drawn by a

pair of take-up wheels at the constant rate of 1.524 m/min through a 2.54 cm diameter pulley attached to a transducer. The distance from the rheometer exit to the transducer pulley is 25.4 cm. The melt tension  
 5 is the measured force in grams at the transducer. The measurement is recorded at the point the observed shear stress reaches a constant value. Two parameters are measured: (a) melt tension in grams (MT), (b) melt viscosity in Pa·s at the specified shear rate of  
 10  $2.66 \text{ s}^{-1}$ .

The melt tension specification is based on the relationship between the two simultaneously measured parameters: MT and the corresponding MV @  $2.66 \text{ s}^{-1}$ . A linear relationship between  $\text{Log}_{10}$   
 15 (MT) and  $\text{Log}_{10}$  (MV @  $2.66 \text{ s}^{-1}$ ) is established for conventional fluoropolymers. This linear relationship is described by the equation:

$$\log_{10}(\text{MT}) = 1.002 \log_{10}(\text{MV @ } 2.66 \text{ s}^{-1}) - 3.568$$

and defines the calibration of the instrument.

20 Statistical analysis has allowed the calculation of a 99% confidence interval which defines the maximum spread of data for conventional polymers about the above calibration line. Polymers which fall within the confidence interval have melt tension values  
 25 expected for conventional polymers. The upper limit of the confidence interval is described by the equation:

$$\text{MT} = 3.3113 \times 10^{-4} \times (\text{MV @ } 2.66 \text{ s}^{-1}).$$

30 Polymers which fall above the upper limit of the confidence interval, satisfying the relationship:

$$\text{MT} > 3.3113 \times 10^{-4} \times (\text{MV @ } 2.66 \text{ s}^{-1})$$

have higher values of melt tension than conventional ones and are thereby distinct from conventional polymers.

10

Melt tension number (MTN) of a polymer is defined by:

$$MTN = (MT)/(MV @ 2.66 \text{ s}^{-1})$$

Polymers which fall above the upper limit of the confidence interval will have the following attribute:

$$MTN > \frac{331 \text{ microgram}}{\text{Pa}\cdot\text{s}}$$

#### EXAMPLES

##### 10 EXAMPLE 1

##### PREPARATION OF ITFB MODIFIED TFE/HFP

A 37.8 l polykettle was charged with 18.1 kg demineralized water, 30 g ammonium perfluorooctanoate (C-8) and 5 g potassium persulfate (KPS). The temperature was raised to 100°C for 10 minutes; the contents were discharged and the polykettle was rinsed with 9.1 kg additional demineralized water.

The polykettle was charged with 24.5 kg filtered demineralized water and 23 g C-8 and pressure tested at 95°C and 4.1 MPa nitrogen pressure. The temperature was reduced to 65°C, the polykettle was evacuated then purged with TFE and evacuated. 60 ml of a solution of ITFB, 4-iodo-3,3,4,4-tetrafluorobutene-1, in "Freon"-113, 1,1,2-trichloro-trifluoroethane, solvent was added to the polykettle. The temperature was raised to 95°C and agitation at 38 rpm begun. The polykettle was pressurized to 2.8 MPa with HFP then to 4.1 MPa with TFE. 600 ml Initiator solution A (APS in water) was pumped in at a rate of 50 ml/min. Initiator solution B (KPS in water) was then fed at a rate of 10 ml/min along with a solution of ITFB in "Freon"-113 at a rate of 2.0 ml/min (See Table I). TFE was fed to the polykettle to maintain a pressure of 4.1 MPa at the specified feed rate of 50 g/min by adjusting the

agitator speed within the specified limits of 25-55 rpm. When the total TFE charge reached 7.9 kg, feeding of TFE was discontinued and the reaction mixture cooled to ambient temperature. The  
5 polykettle was vented, the polymer dispersion was discharged and mechanically coagulated. The dewatered flake was subsequently heat-treated at 370°C for 3 hr. Properties are shown in Table II.

Similarly prepared copolymers exhibited  
10 iodine evolution of over 0.00005 weight percent.

15

20

25

30

35

TABLE I

BATCH NUMBER	ITFB in "Freon" 113 (g/l)	TOTAL ITFB SOLUTION FED (ml)	INITIATOR A APS IN WATER (g/l)	INITIATOR B KPS IN WATER (g/l)	TOTAL ITFB CHARGED WT %
I-1	6.36	380	4.0	20.0	0.03
I-2	3.18	380	4.0	15.0	0.015

TABLE II

BATCH NUMBER	$MV_5$ $2.66 \text{ s}^{-1}$ (Pa·s x $10^{-3}$ )	MELT TENSION (g)	MELT TENSION NUMBER $\mu\text{g}/\text{Pa}\cdot\text{s}$	HFPI	$MV_5$ Pa·s x $10^{-3}$
I-1	6.73	2.9	430	3.94	9.2
I-2	3.96	1.4	350	3.78	9.0
Comparison resin*	6.65	1.8	270	3.8 to 4	7.5-8.5

\* a commercial resin for comparison that contains about 89 weight percent tetrafluoroethylene units and about 11 weight percent hexafluoropropylene units.

EXAMPLE 2:

## PREPARATION OF ITFB MODIFIED TFE/PPVE RESIN

A 37.8 l polykettle was charged with 18.1 kg demineralized water, 30 g ammonium perfluorooctanoate (C-8) and 5 g ammonium persulfate (APS). The temperature was raised to 100°C for 30 minutes; the contents were discharged and the polykettle was rinsed with 9.1 kg additional demineralized water.

The polykettle was charged with 26.1 kg filtered demineralized water, 32 g C-8 and 29.5 g ammonium carbonate. The temperature was reduced to the temperature of the cooling water. The polykettle was evacuated/purged with TFE three times and finally evacuated. Ethane was admitted to the system until a specified rise in pressure was obtained. 350 ml "Freon" 113 and 135 ml of a solution of ITFB in PPVE was added to the polykettle. The temperature was raised to 80°C and agitation at 50 rpm was begun. The pressure inside the polykettle was raised to 2.1 MPa gauge by adding TFE. 500 ml of Initiator solution A was pumped in at a rate of 50 ml/min. Then Initiator solution B (APS in water) was fed at a rate of 10 ml/min along with the solution of ITFB in PPVE at a feed rate of 1 ml/min. TFE was fed to the polykettle to maintain a pressure of 2.1 MPa gauge at a specified feed rate of 49 g/min by adjusting the agitator speed (See Table III). When the total TFE charge reached 6.8 kg, feeding of TFE and the PPVE solution was discontinued and agitation was stopped. The reaction mixture was cooled to ambient temperature and the polykettle was vented and flushed with nitrogen. The polymer dispersion was discharged and mechanically coagulated. The dewatered flake was subsequently heat-treated at 250°-370°C for 3 hr. Properties are given in Table IV.

Iodine content of similarly prepared copolymers was over 0.00005 weight %.



TABLE III

BATCH	INITI- ATOR A APS IN WATER g/l	INITI- ATOR B APS IN WATER g/l	ETHANE PRESSURE (KPa)	TOTAL ITFB CHARGED wt %	TOTAL ITFB SOLUTION PED (ml)	ITFB IN PPVE (g/l)
II-1	3.0	2.0	23.7	0.03	275	7.58
II-2	3.0	2.0	33.9	0.03	275	7.58
II-3	3.0	2.0	50.8	0.03	275	7.58
II-4	6.0	4.0	16.9	0.03	275	7.58

TABLE IV

BATCH	MV @ 2.66 s. <sup>-1</sup> Pa·s × 10 <sup>-3</sup>	MELT TENSION g	MELT TENSION NUMBER / g / Pa·s	PPVE CONTENT Wt. %	MV <sub>5</sub> , Pa·s × 10 <sup>-3</sup>
II-1	7.97	3.3	410	3.52	3.68
II-2	6.51	2.95	450	3.58	2.25
II-3	9.07	3.5	390	2.46	2.91
II-4	6.58	3.2	490	3.42	2.45
(Comparison Resin TFE/PPVE resin)	5.41	1.6	290	2.3	7.5-10.5

EXAMPLE 3:

## EXTRUSION PERFORMANCE OF TFE/HFP/ITFB

Resins were extruded onto AWG #12 wire at the maximum line speed before the onset of melt fracture. The commercial resin used in Example 1 for comparison was used as a control. The physical and electrical properties of the coated wire were then evaluated and found to be satisfactory. The results on extrusion rates are shown in Table V. The faster extrusion rates of resins of this invention (I-1 and I-2) over the commercial resin are evident.

TABLE V

Example	wt% ITFB	HFPI	MV <sup>5</sup> Pa·s×10 <sup>-3</sup>	Maximum Extrusion Rate onto AWG #12 Wire, m/min	MELT TENSION NUMBER μg/Pa·s
I-1	0.030	3.78	9.2	33.5	430
I-2	0.015	3.94	9.0	24.4	350
Comparison Resin	0.0	3.80	7.5-8.5	10.7	270

CLAIMS

1. A melt-processible, non-elastomeric, thermoplastic, non-thermosetting tetrafluoroethylene copolymer resin which contains

5 a) at least 99.97 weight percent recurring units derived from tetrafluoroethylene based on weight of a) and b),

b) sufficient recurring units, but not more than 0.03 weight percent based on a) and b), derived  
10 from at least one iodo(perfluoroalkyl) ( $C_1-C_{10}$ ) ethylene wherein the alkyl group is from 1-10 carbons to produce, at least 0.00005 weight percent iodine, based on weight of a) and b),

c) between 0.5-20 weight percent based on  
15 weight of a), b) and c), recurring units derived from at least one ethylenically unsaturated comonomer of the formula  $R_fCF=CF_2$  or  $R_fOCF=CF_2$  or mixtures thereof wherein  $R_f$  is perfluoroalkyl of 1-10 carbon atoms,

20 said copolymer having

(i) a melt tension number of at least 331 micrograms per Pa·s,

(ii) an  $MV^5$  of between  $10^2$  and  $10^6$  Pa·s at the processing  
25 temperature of the copolymer.

2. The copolymer of Claim 1 wherein component (b) is 4-iodo-3,3,4,4-tetrafluorobutene-1.

3. The copolymer of Claim 2 wherein component (c) is  $CF_3-CF=CF_2$ .

30 4. The copolymer of Claim 2 wherein component (c) is  $CF_3CF_2CF_2-O-CF=CF_2$ .

5. A process for preparing a copolymer defined in Claim 1 which comprises reacting the tetrafluoroethylene, iodoperfluoroalkyl ethylene and  
35 at least one third comonomer (component (c)), in the

presence of an initiator and a surfactant in aqueous medium at a temperature of between 30 and 120°C and at a pressure of between 0.69 and 5.5 MPa gauge.

6. The process of Claim 5 wherein the  
5 resulting dispersion is treated to coagulate the copolymer formed.

10

15

20

25

30

35